


	STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
	GA.	CSNHS-0000-00(535)	170	266

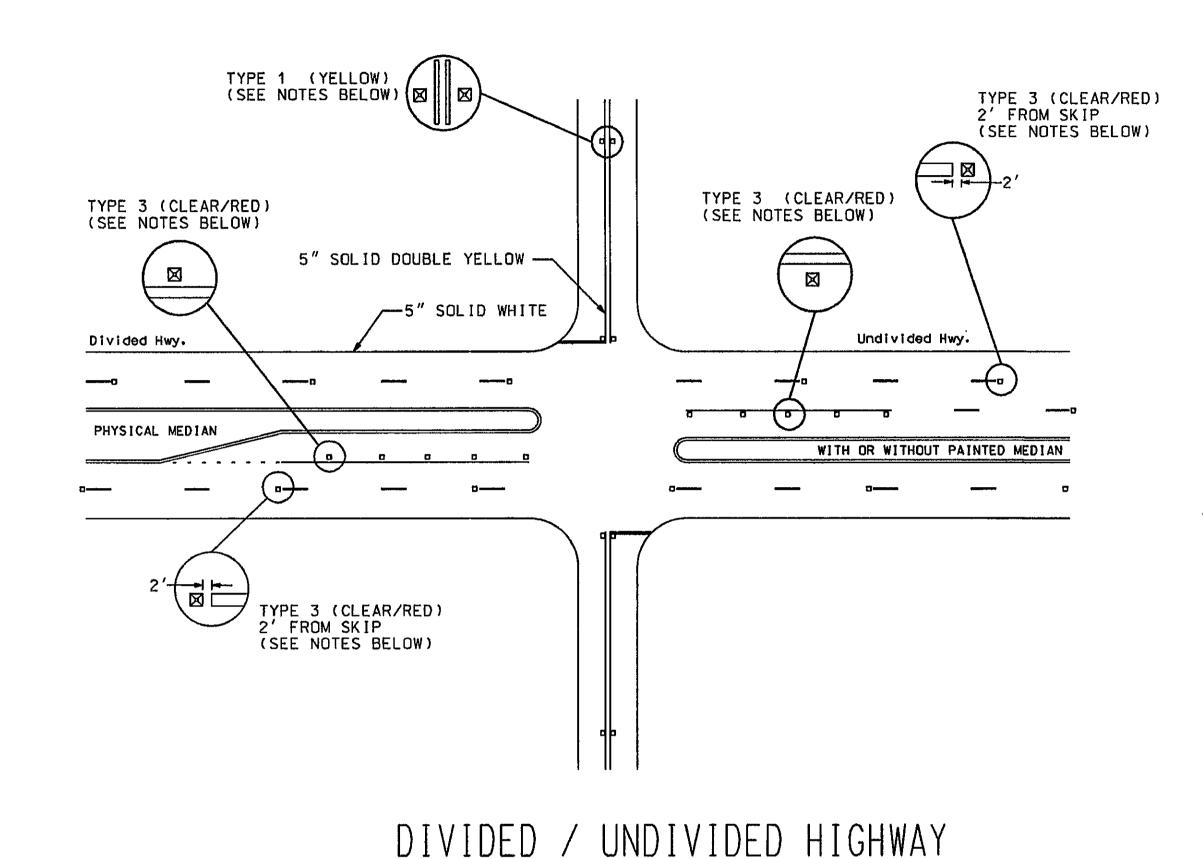


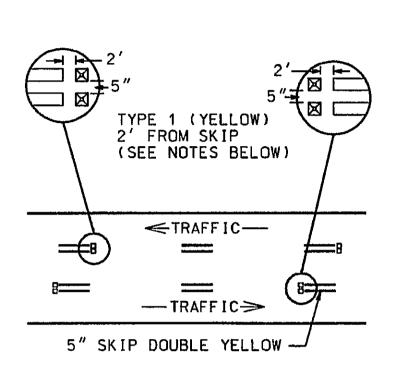


REVERSIBLE LANE

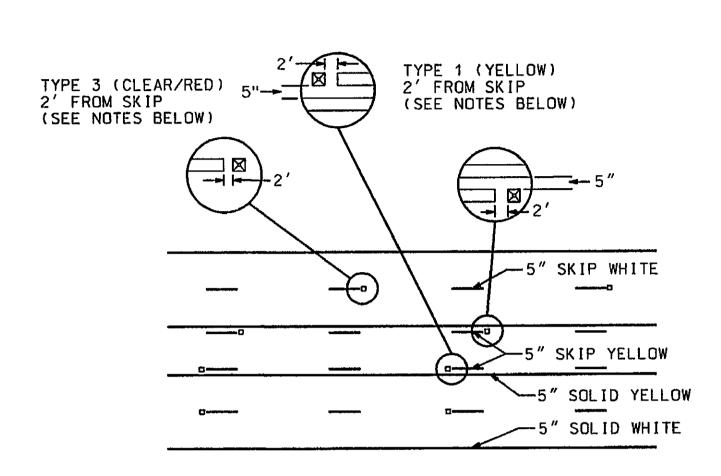

TWO WAY LEFT TURN LANE

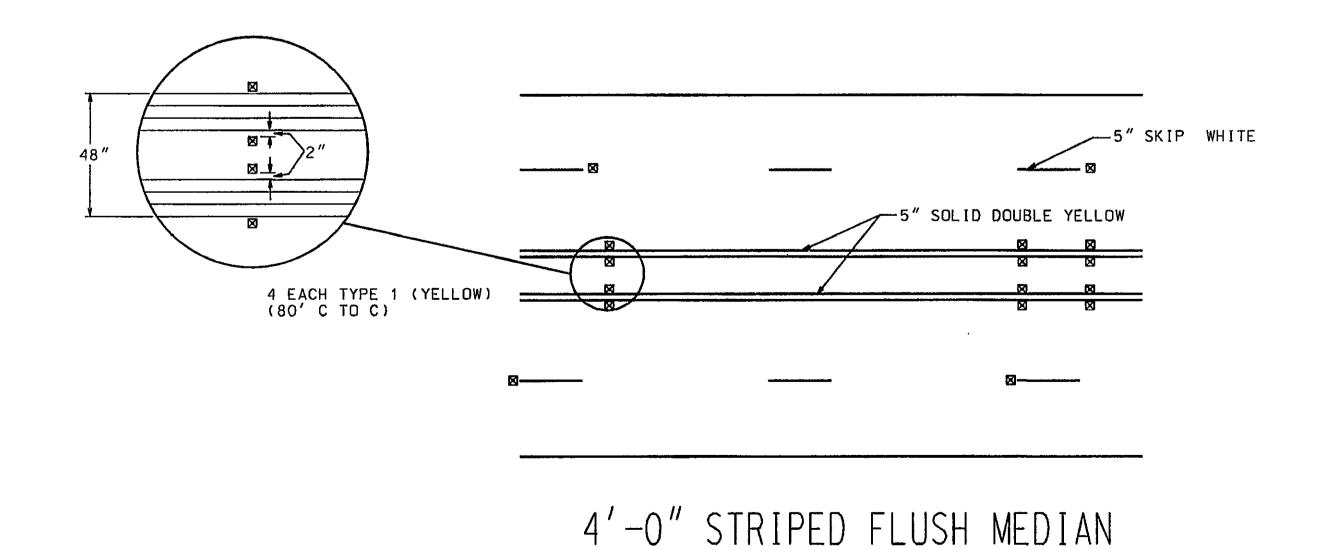

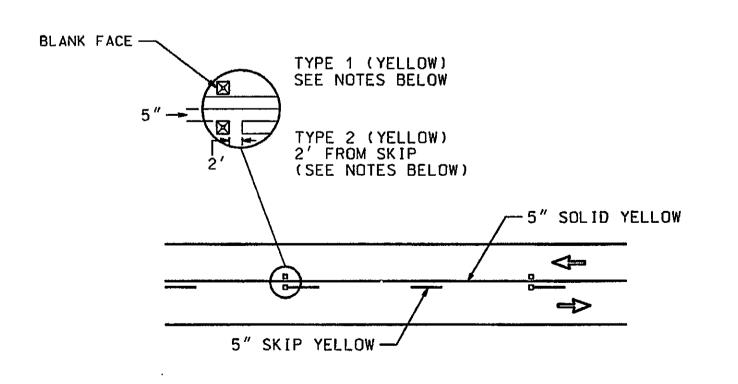

NO PASSING ZONE

## GENERAL NOTES:

- 1. RAISED PAVEMENT MARKERS SHALL BE SPACED EVERY 80 FT UNLESS OTHERWISE SPECIFIED.
- ON SOLID WHITE TURN BAY LINES, SPACING SHALL BE 20 FT.
  RAISED PAVEMENT MARKERS SHALL BE OFFSET 5 INCHES FROM SOLID LANE LINES.
- 4. CLEAR FACE OF TYPE 3 RAISED PAVEMENT MARKERS SHALL BE ORIENTED TOWARD ONCOMING TRAFFIC.
- 5. ON HORIZONTAL CURVES WHERE AT LEAST 3 MARKERS CANNOT BE SEEN AT ONE TIME USING NORMAL SPACING. MARKERS SHALL BE PLACED 40 FT.

DATE	REVISIONS	GEORGIA DEPARTMENT OF TRANSPORTATION OFFICE OF TRAFFIC SAFETY & DESIGN	
9-4-03	NO PASSING ZONE RPM's		
1-13-04	NO PASSING ZONE RPM's		
		DETAILS OF	
		RAISED PAVEMENT MARKER LOCATION	
	NON-LIMITED ACCESS ROAD		
		NO SCALE JANUARY 2000	